

TOP-FLO[®] TF-C Series Centrifugal Pumps

Capacity Curves


Based on water at 70°F (22°C)

Model: TF-C328

60 Hz

3500 RPM

Size: 3 x 2 x 8

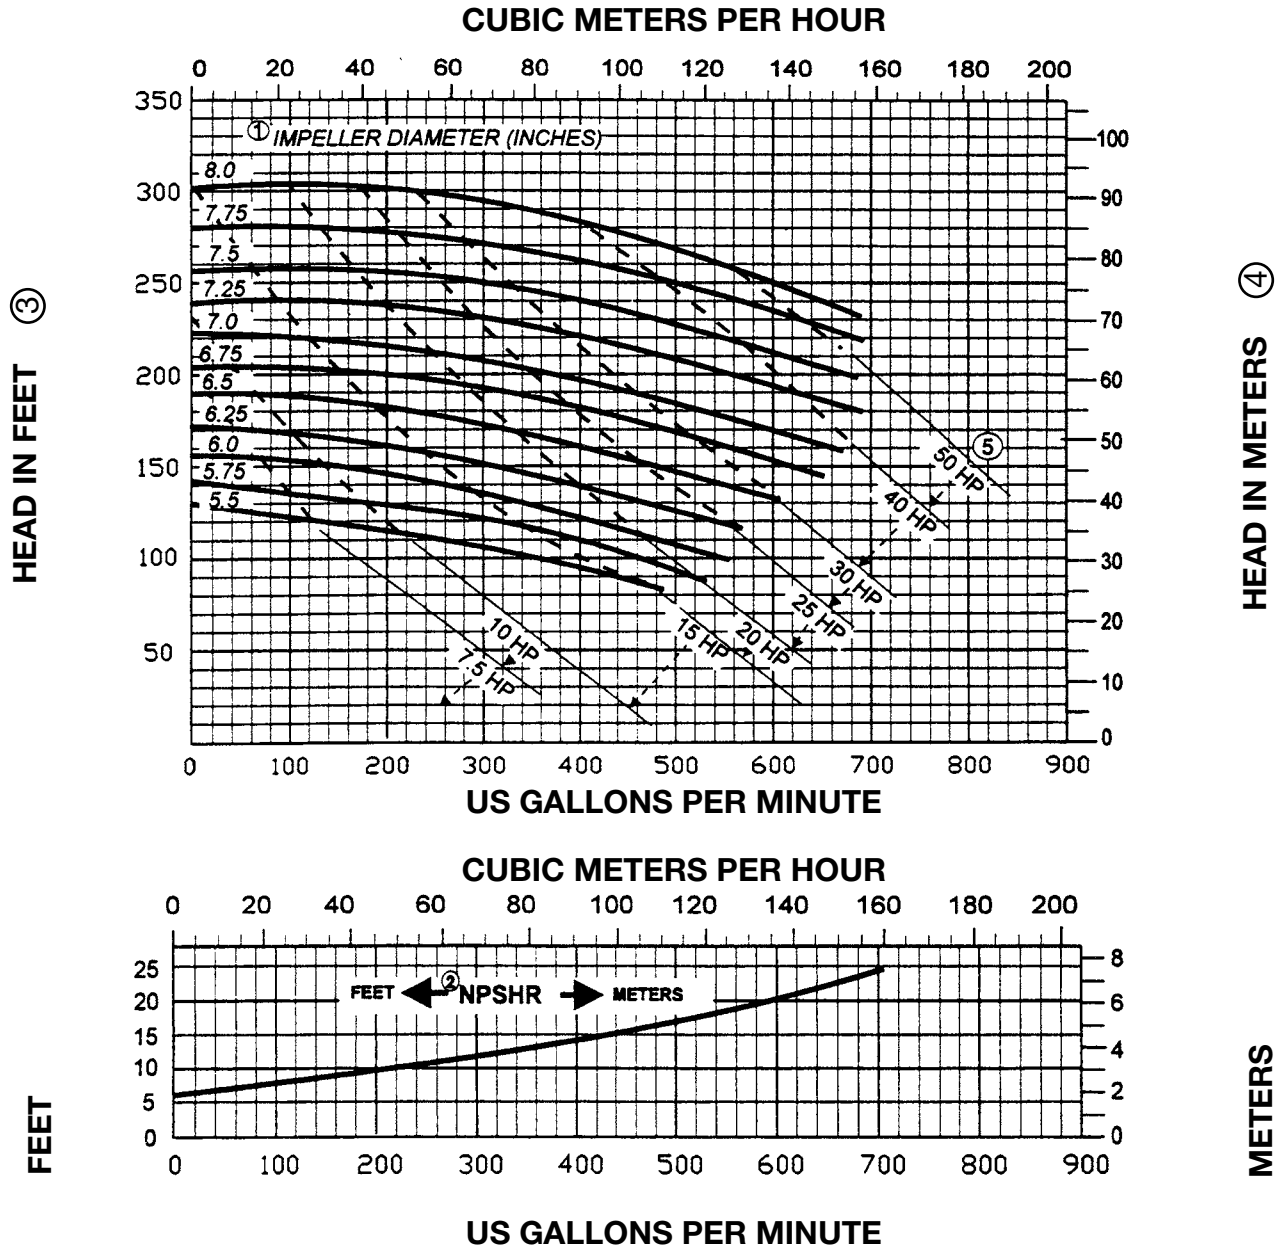

- NOTES:**
- ① Impeller diameters available in 1/4 inch increments
 - ② NPSHR is shown for maximum impeller diameter
 - ③ $PSI = \frac{\text{Head in Feet} \times \text{Specific Gravity}}{2.3}$
 - ④ $Kg/cm^2 = \frac{\text{Head in Meters} \times \text{Specific Gravity}}{10}$
 - ⑤ $HP \times 0.746 = Kw$

TOP-FLO® TF-C Series Centrifugal Pumps

Capacity Curves


Based on water at 70°F (22°C)

Model: TF-C328

60 Hz

3500 RPM

Size: 4 x 2 x 8

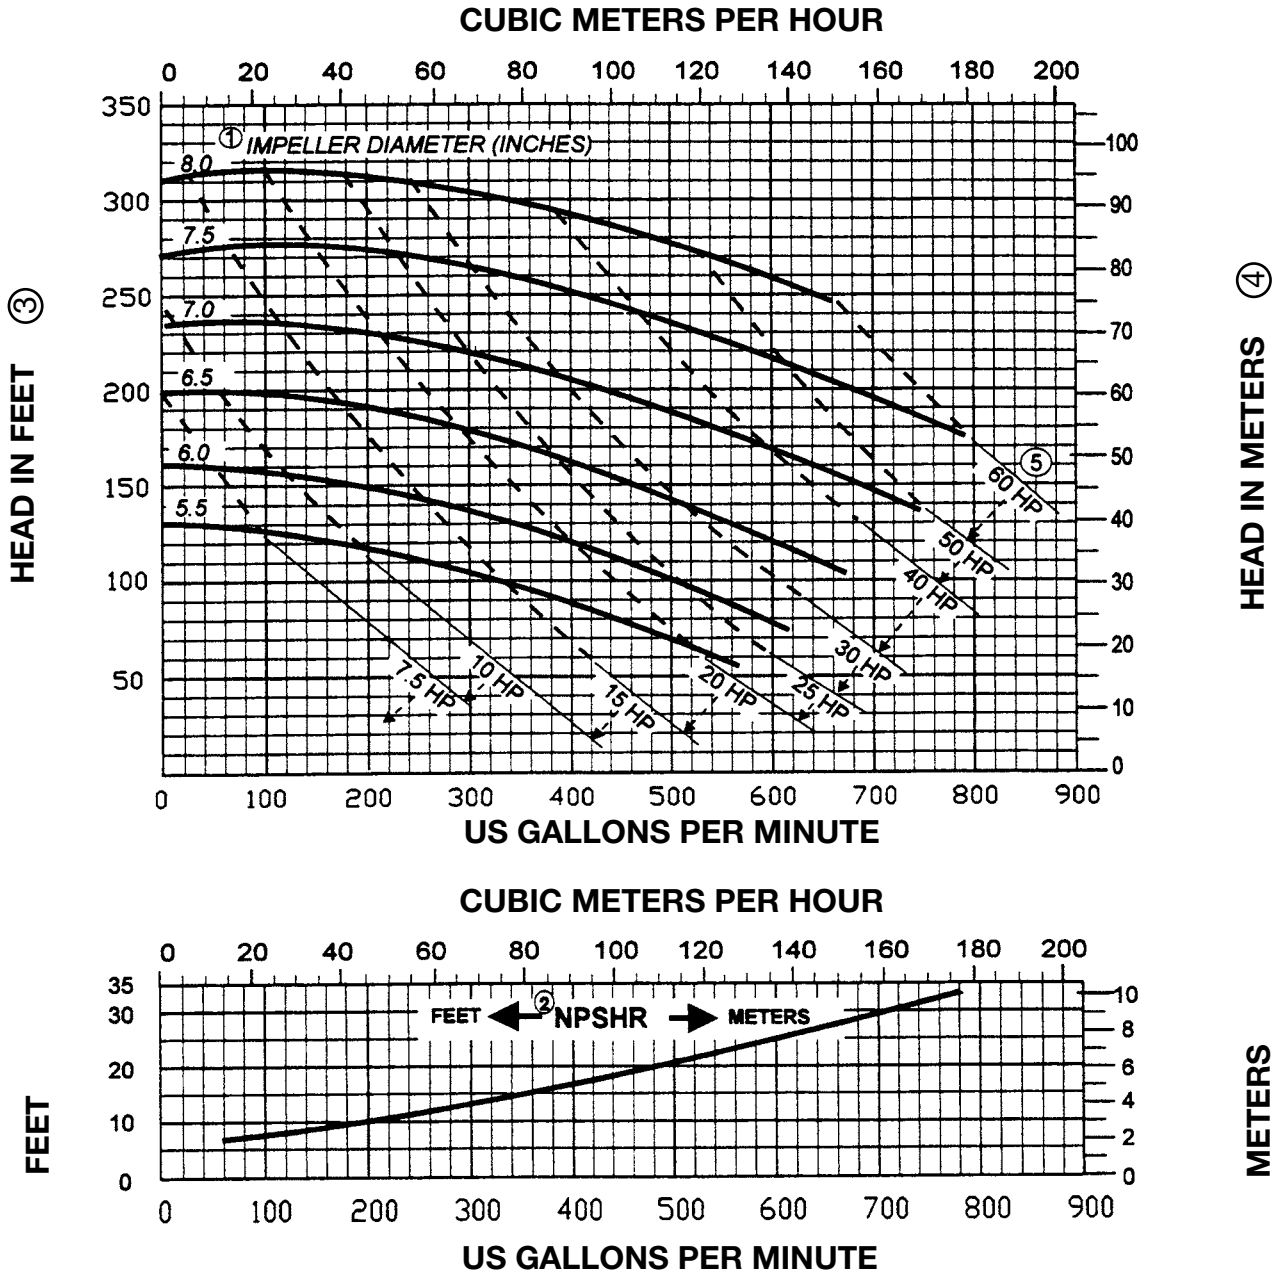

NOTES:

- ① Impeller diameters available in 1/4 inch increments
- ② NPSHR is shown for maximum impeller diameter
- ③ $PSI = \frac{\text{Head in Feet} \times \text{Specific Gravity}}{2.3}$
- ④ $Kg/cm^2 = \frac{\text{Head in Meters} \times \text{Specific Gravity}}{10}$
- ⑤ $HP \times 0.746 = Kw$