

TOP-FLO[®] TF-C Series Centrifugal Pumps

Capacity Curves


Based on water at 70°F (22°C)

Model: TF-C216

60 Hz

3500 RPM

Size: 2 x 1-1/2 x 6

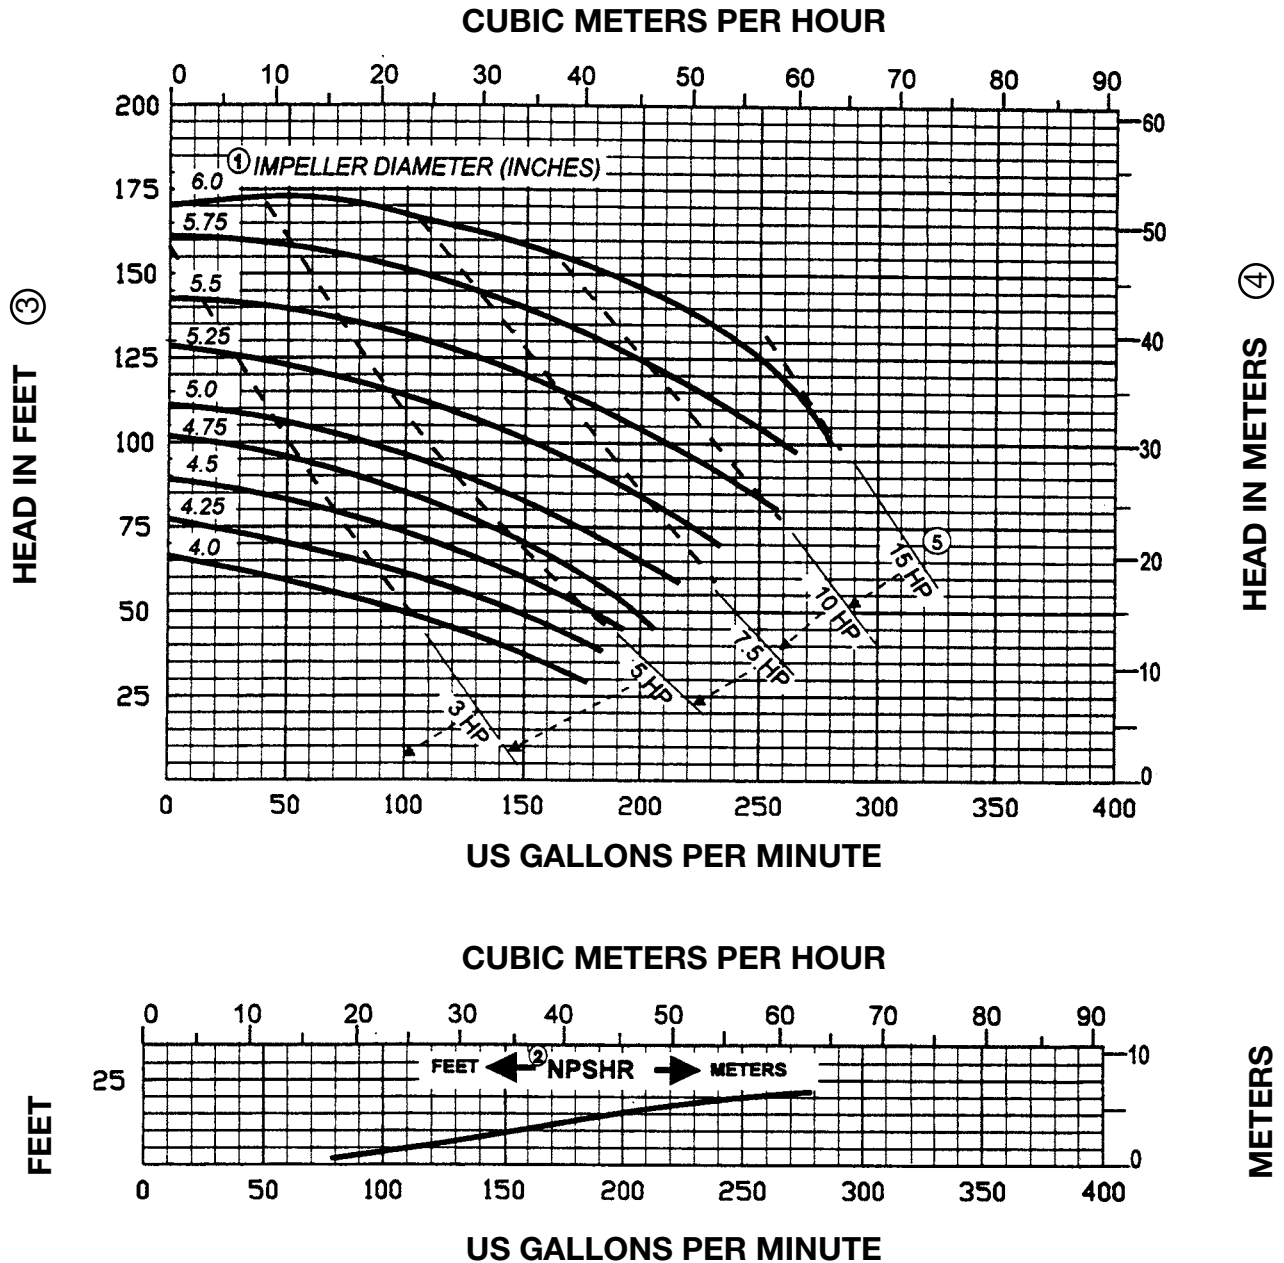

NOTES:

① Impeller diameters available in 1/4 inch increments

④ $\text{Kg/cm}^2 = \frac{\text{Head in Meters} \times \text{Specific Gravity}}{10}$

② NPSHR is shown for maximum impeller diameter

⑤ $\text{HP} \times 0.746 = \text{Kw}$

③ $\text{PSI} = \frac{\text{Head in Feet} \times \text{Specific Gravity}}{2.3}$

TOP-FLO® TF-C Series Centrifugal Pumps

Capacity Curves


Based on water at 70°F (22°C)

Model: TF-C216

60 Hz

3500 RPM

Size: 2-1/2 x 1-1/2 x 6

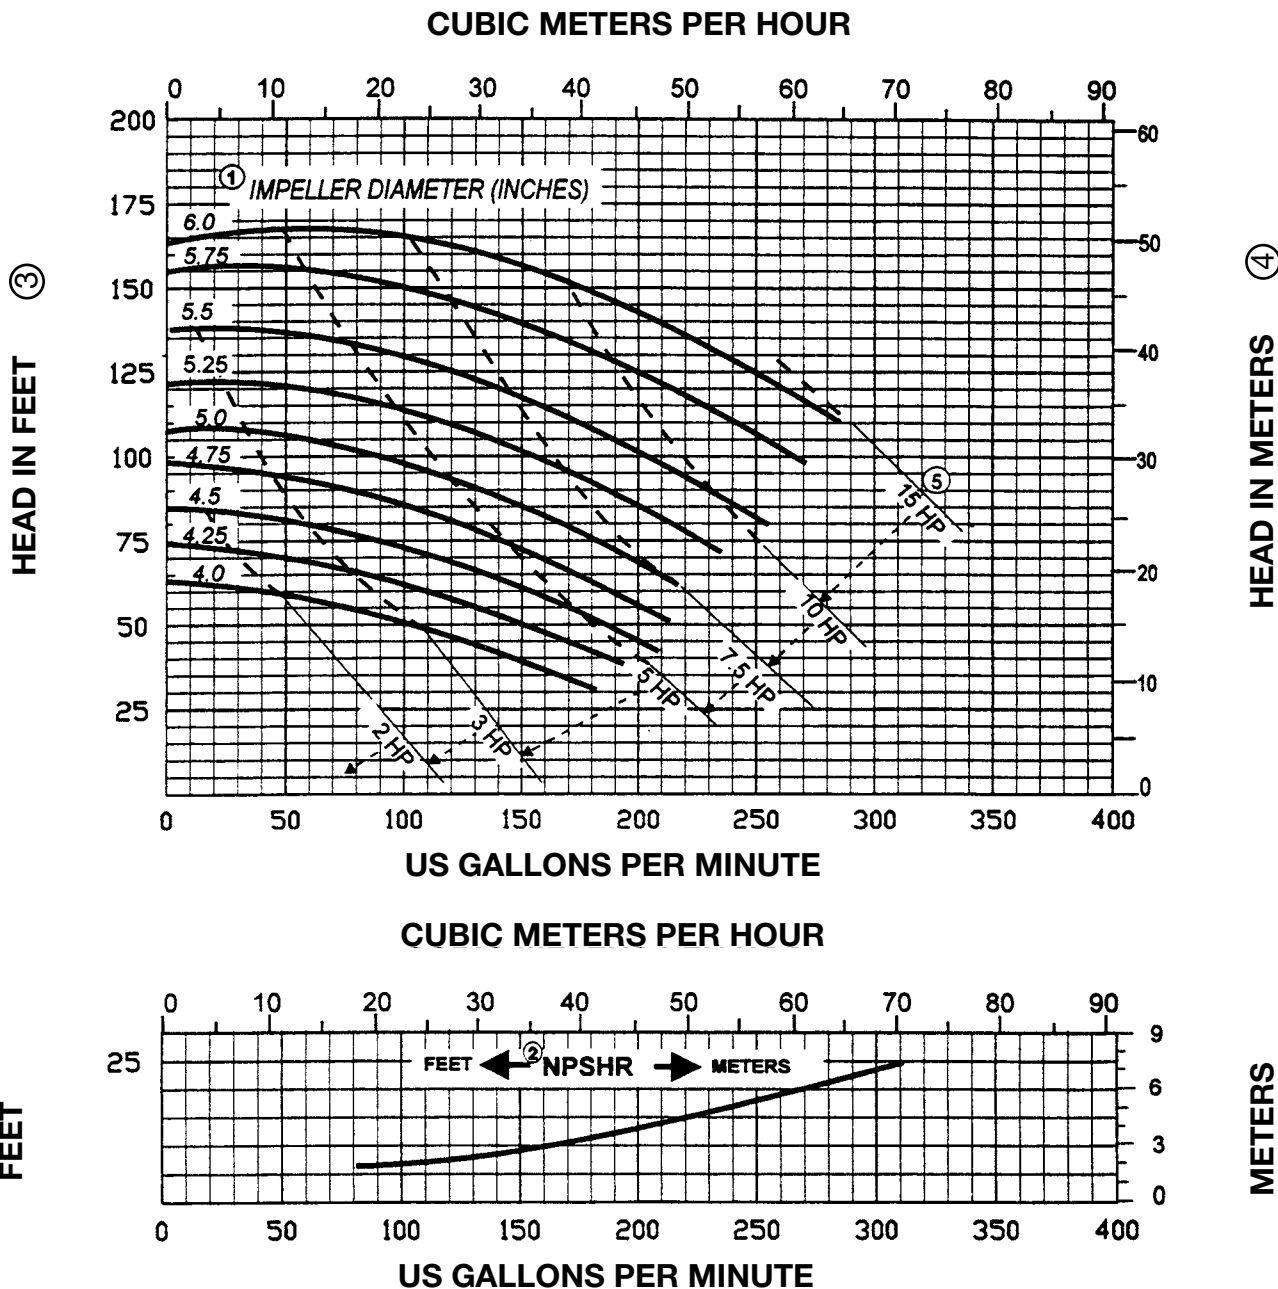

NOTES:

- ① Impeller diameters available in 1/4 inch increments
- ② NPSHR is shown for maximum impeller diameter
- ③ $PSI = \frac{\text{Head in Feet} \times \text{Specific Gravity}}{2.3}$
- ④ $Kg/cm^2 = \frac{\text{Head in Meters} \times \text{Specific Gravity}}{10}$
- ⑤ $HP \times 0.746 = Kw$