







HS IN-LINE

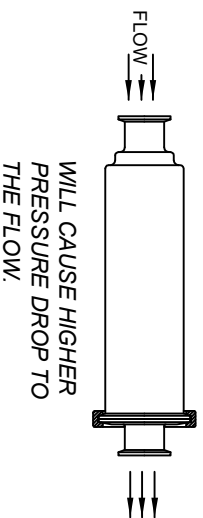

HS SIDE-CONNECTION

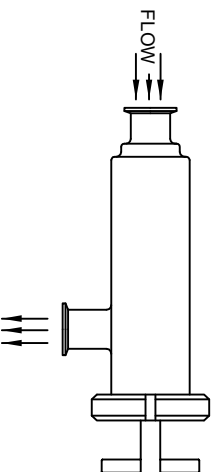

HS "Y" TYPE

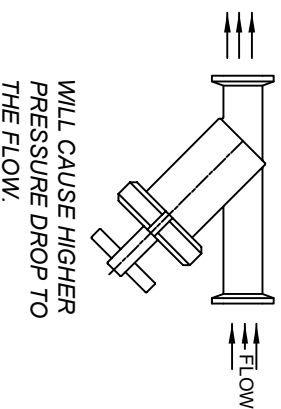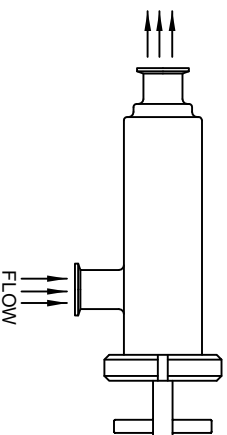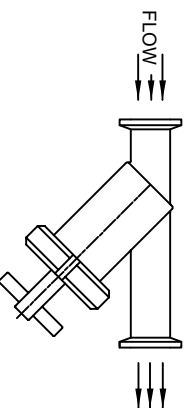



When Clogged Maximum Allowable Differential Pressure " ΔP " :


Flow from inside of wedge wire element to outside $\longrightarrow \Delta P_{max} = 30\text{psi}$

Flow from outside of wedge wire element to inside $\longleftarrow \Delta P_{max} = 15\text{psi}$

**Values based on water at ambient temperature. **



 : Filter element

	TITLE:		
	FILTER FLOW INFORMATION		
Sanitary / Biopharma / Industrial WWW.HALESONINC.COM Tel: (480) 386-6883 Fax: (480) 886-7776	SIZE SKETCH NLT.	REV	
SCALE: NONE	A	0	DATE: 09 FEBRUARY 2021 SHEET 1 OF 1