


EXTREMEFLEX FOOD GRADE

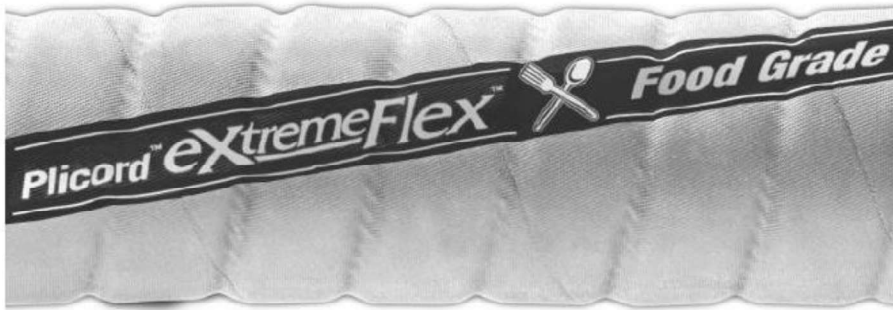

Product Specification

Application

Plicord ExtremeFlex Food Grade is for both dry food transfer and liquid transfer. A high-tech, flexible corrugated hose with pretzel-like agility and proven performance. Best of all, it's available at a non-corrugated price, making it a great value. With ExtremeFlex, there's even more to appreciate:

- Easier to move in and out of tight spaces and around sharp corners.
- Easier to lift and carry, so there are fewer workplace injuries.
- Easier to connect and disconnect, keeping productivity high. highly demanding service of transferring non-oily liquid products in wineries and breweries.

Construction Tube

White Chemivic™ synthetic rubber (FDA/USDA compliant and conforms to 3-A Sanitary Standard 18-03)

Cover

White or gray Chemivic™ corrugated synthetic rubber (wrapped impression)

Reinforcement

Spiral-plied synthetic fabric with galvanized wire helix

Temperature Range

-25F to 212F (-32C to 100C)

Packaging

Coiled & polywrapped

Branding Spiral

CONTITECH PLICORD® EXTREMEFLEX® FOOD GRADE 150 PSI WP

Coupling

Refer to the Continental ContiTech Industrial Hose Assembly Manual for crimp specifications.

Non Stock / Sizes

400' minimum order

Order Codes

549-462 (white)

549-164 (gray)

EXTREMEFLEX FOOD GRADE

ID		OD		Bend Radius		WP		Weight		Vacuum HG	
in.	mm	in.	mm	in.	mm	PSI	MPa	lbs./ft.	kg/m	in.	mm
1	25.4	1.45	36.9	1	25	150	1.03	0.61	0.91	29	737
1 1/4	31.8	1.65	42.0	1.25	32	150	1.03	0.64	0.95	29	737
1 1/2	38.1	1.94	49.3	1.5	38	150	1.03	0.81	1.21	29	737
2	50.8	2.44	62.0	2	51	150	1.03	1.05	1.56	29	737
3	76.2	3.56	90.5	3	76	150	1.03	2.07	3.08	29	737
4	101.6	4.59	116.6	4	102	150	1.03	2.92	4.35	29	737