



TrueClean Connect

Simplify CIP by minimizing dead leg in your tank


Features

- Provides a hygienic tank connection
- Minimizes dead leg and shadowing by bringing clamped connection closer to the tank surface
- Split ring design
- Meets ASME-BPE criteria
- 100% traceability from original material to finished part
- Double-certified welded flange and split ring material

Applications

- Connect safety devices, sampling systems, sight glasses, valves, and measuring equipment to vessels, tanks, lines, or silos
- Insertion of spray heads or surge cleaners
- CIP/SIP of vessels

TrueClean[®] Connect

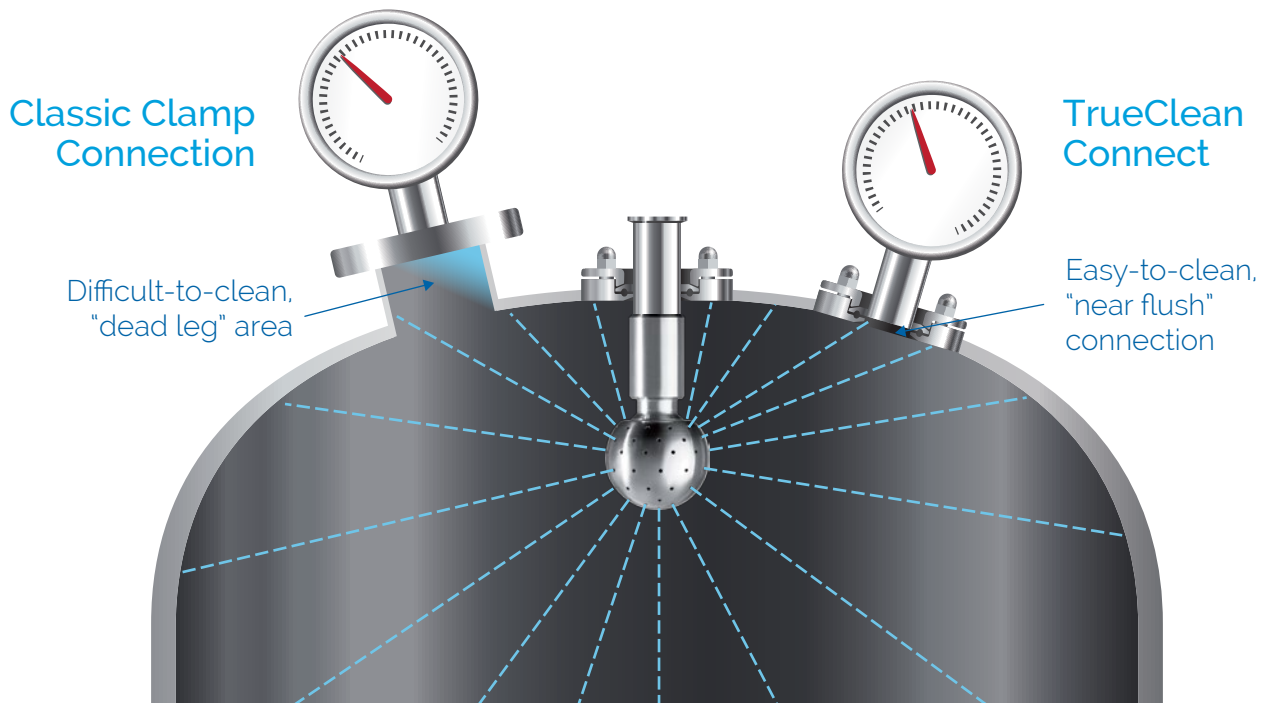

TrueClean[®] Connect

Sizes	1/2" – 4"
Material	316L (welded flange and split ring)
Surfaces	20 Ra max (product contact surface) 47 Ra max (other surfaces)
Operating pressure	-15 – 100 psi
Operating temperature	-110 – 390°F
Connection styles	Tri-Clamp ^{®*}

*DIN, ISO, and BS available upon request

