


Unit : MM

	D±0.5	L±1.6	H±3	W±3	S±0.7
1/4"	11.6	48.5	44	94	19
3/8"	12.5	48.5	44	94	21
1/2"	15	58	50	104	25.5
3/4"	20	65	59	113	31
1"	25	77	65	128	37.5
1-1/4"	32	90	79	156	46
1-1/2"	38	98.6	83	156	52.5
2"	50	121	99	194	66
2-1/2"	64	145	128	246	82.5
3"	76	166	133	246	97.5
4"	94	240	175	317	130

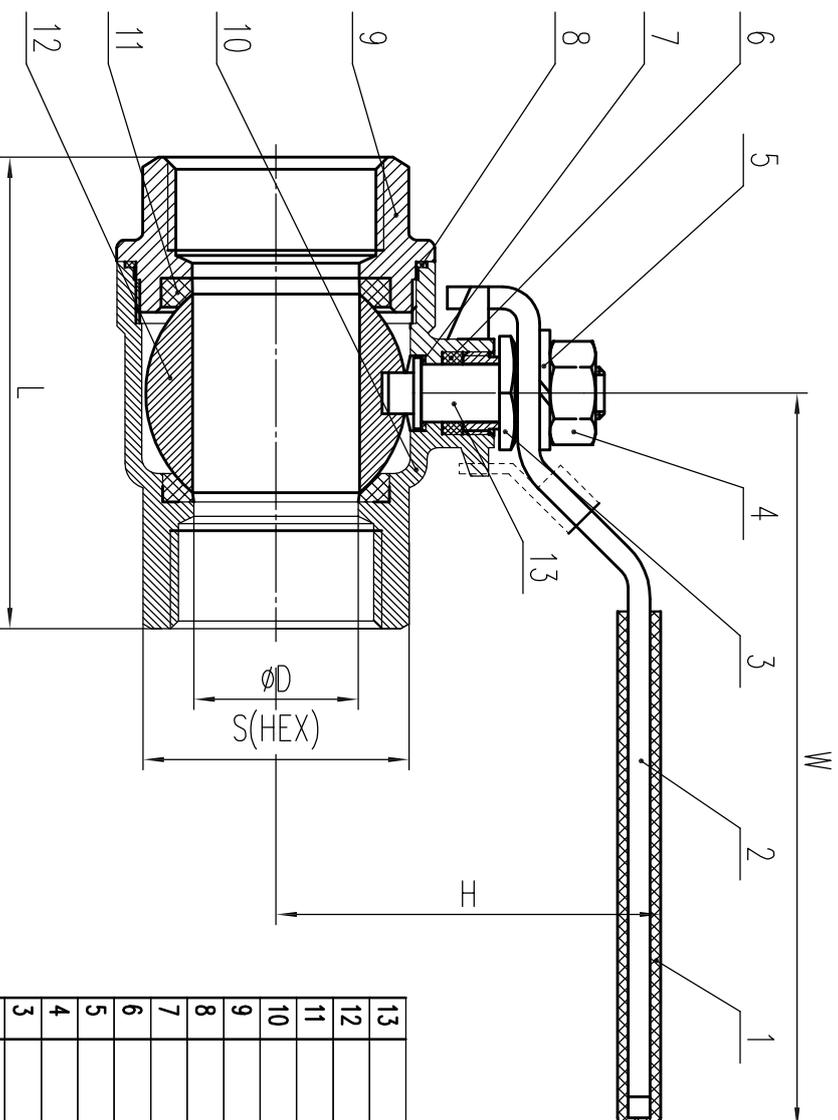


**TWO-PIECE SCREWED BALL VALVES**

- \*For food and general chemical service application
- \*Adjustable stem packing
- \*Blow-out-proof stem design
- \*Body and end cap quality investment casting
- \*Available in carbon or stainless steel body construction
- \*100% tested by air under water, at 100 psi, open and closed positions

**SPECIFICATIONS**

- \*Working pressure: 1/4" ~ 2" 1000 psi W.O.G.
- 2-1/2" ~ 4" 800 psi W.O.G.
- \*End types: threaded Ends

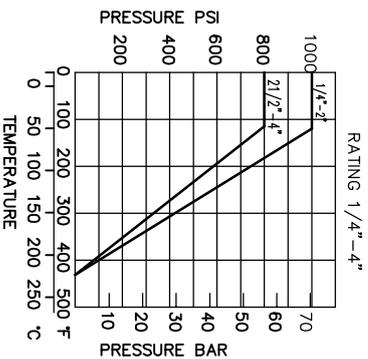

13	STEM	1	SUS 316					
12	BALL	1	ASI 316					
11	BALL SEATS	2	25% R-TFE					
10	BODY	1	CF8M S.S.316					
9	CAP	1	CF8M S.S.316					
8	JOINT GASKET	1	PTFE					
7	THRUST WASHER	1	PTFE					
6	STEM PACKING	1	PTFE					
5	SPRING WASHER	1	304					
4	STEM NUT	1	304					
3	GLAND NUT	1	304					
2	HANDLE	1	304					
1	PLASTIC SLEEVE	1	PLASTIC					
No.	Part Name	Qty	Material					

		2-PC Ball Valves Stainless Steel	
		1000 W.O.G.	