



S Series & SF

Effective, economical
cleaning for any size tank

Features


- High-impact spray for strong cleaning
- Hygienic, self-cleaning construction
- Dual bearings of the S series allow for mounting at any angle
- Multiple spray patterns for targeted cleaning
- Increased mechanical action reduces CIP time and costs
- SF model is 3A compliant

Applications

- Static spray ball replacement
- Heavily soiled tank surfaces
- 3A applications
- Higher pressures, lower flow

TrueClean® S Series & SF

S Series

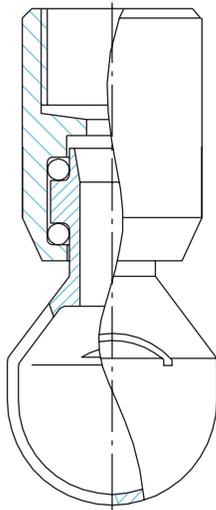


TrueClean® S Series

Material	316L
Connection	Pin, thread, weld
Bearing	Double ball bearing*
Spray pattern	90°, 180°, 270°, 360°
Tank diameter	1 – 19 ft
Pressure	15 – 73 psi
Flow rate	1 – 75 gpm

*Hastelloy® C-22® available upon request

SF

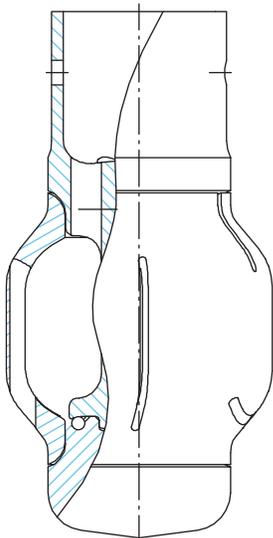

TrueClean® SF

Material	316L, PEEK
Connection	Pin, weld
Bearing	Slide bearing
Spray pattern	270°
Tank diameter	2 – 7 ft
Pressure	15 – 73 psi
Flow rate	15 – 27 gpm

*Hastelloy® C-22® available upon request