


Technical Data

Maximum Operating Pressure 1" to 4"	145 PSI (10 bar) at ambient temperature
Maximum Operating Pressure 6" and 8"	85 PSI (6 bar) at ambient temperature
Operating Temperature Range	-10°C to 95°C Depending on operating pressure. Consult us
Body Material Options	SS304 or SS316L
Internal Surface Finish	32 Ra max
Seat Material Options	Silicone, EPDM or Viton
Handle Options	Multiposition Lever available 4 positions (shown below), Multiposition blue plastic, Multiposition stainless-steel

Manual Clamp Butterfly Valve

Size	A	B	C	D
1"	25.4	50.5	66	151
1½"	38.1	50.5	70	151
2"	50.8	64	76	151
2½"	63.5	77.5	80	151
3"	76.2	91	84	183
4"	101.6	119	104	183
6"	152.4	166.8	110	208
8"	204	217	120	300
10"	254	268	120	380


Dimensions in mm

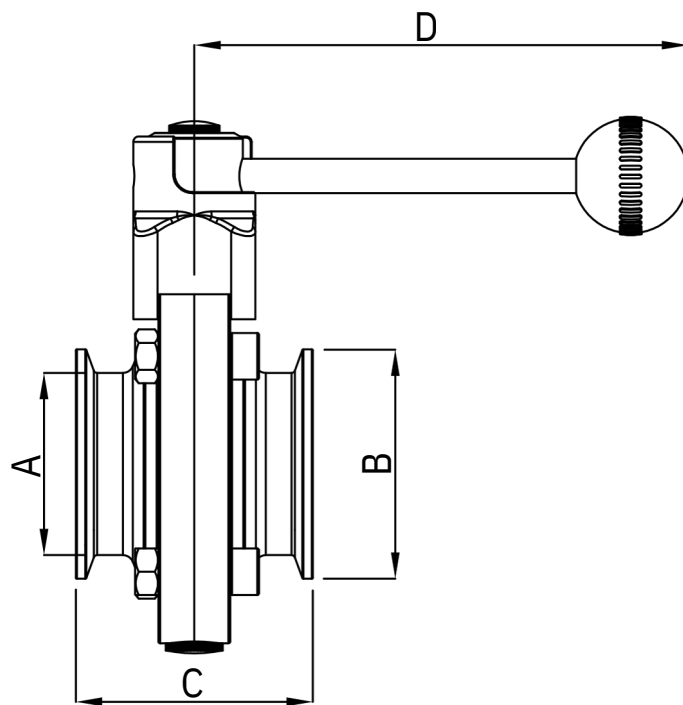

Manual Weld Butterfly Valve

Size	A	B	C
1"	25.4	50	151
1½"	38.1	50	151
2"	50.8	52	151
2½"	63.5	56	151
3"	76.2	58	183
4"	101.6	64	183
6"	152.4	80	208
8"	203.2	90	300
10"	254	104	380

Dimensions in mm

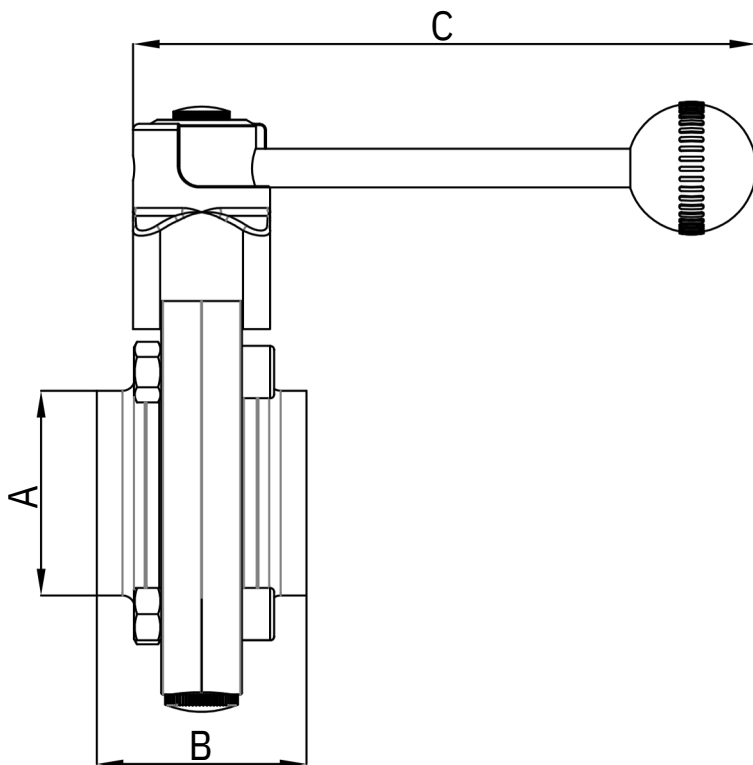

Flow Rate/ Pressure Drop

