
BEER, WINE, CIDER & SPIRITS PUMPS



Product Information


FDA Santoprene elastomers suitable for Beer, Wine, **Cider and Spirits includes grounding lug.** Tri-Clamp adapter option available Liquid end made from 316 (CF8M) Stainless Steel. Maxiumum pump temperature of 107 °C (224.6 °F). Manufactured in the USA.

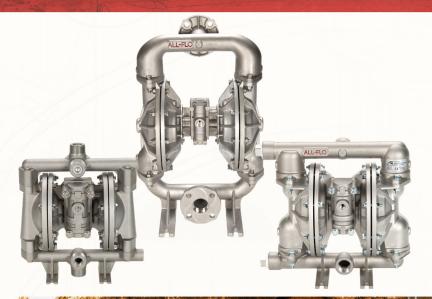

	A050	A075	A100	A150	A200	A300
Size	1/2	3/4		1-1/2		3
Materials of Construction	316 Stainless Steel with FDA Santoprene Wet End					
Connection	FNPT	FNPT	FNPT	ANSI/DIN FLANGE	FNPT ANSI/DIN FLANGE	ANSI/DIN FLANGE
Max Flow	15 gpm	15 gpm	48 gpm	115 gpm	190 gpm	235 gpm
	(56.8 lpm)	(56.8 lpm)	(182 lpm)	(435 lpm)	(719 lpm)	(890 lpm)
Max Particle Size	3.2 mm	3.2 mm	6.4 mm	6.4 mm	6.4 mm	11 mm
	(1/8 in)	(1/8 in)	(1/4 in)	(1/4 in)	(1/4 in)	(7/16 in)
Max Temperature	107 °C					
	224.6 °F					
Max Air	120 psi					
Pressure	(8.2 bar)					

For drawings and additional information, please visit www.all-flo.com





Sizes: 1/4", 3/8", 1/2", 3/4", 1", 1-1/2", 2" Materials: Polypropylene, PVDF, Conductive Nylon Elastomers: Geolast[®], PTFE, Santoprene[®], Viton[®] / FKM

Sizes: 1/2", 1", 1-1/2", 2", 3" Materials: Aluminum, Anodized Aluminum, Stainless Steel Elastomers: Buna-N, EPDM, Geolast®, PTFE, Santoprene®, Urethane, Viton® / FKM

Industrial Metal





Sizes: 1", 1-1/2", 2" Materials: Passivated Stainless Steel Elastomers: Hytrel®, PTFE, Santoprene®

Sizes: 3/8", 1/2", 1", 1-1/2", 2", 3" Materials: Polished Stainless Steel Elastomers: Buna-N, EPDM, Integral PTFE





Sizes: ¼″, ¾″, ½″, 1″, 1-½″, 2″ Materials: Conductive PTFE, PTFE Elastomers: Integral PTFE

Pulsation Dampeners

Sizes: 3/8", 1/2", 1", 1-1/2", 2", 3" Materials: Polyethylene, PTFE, Aluminum, Stainless Steel, Polished Stainless Steel Elastomers: Buna-N, EPDM, PTFE



www.all-flo.com sales@all-flo.com 440-354-1700 Haleson HS Sanitary / Biopharma / Industrial

www.halesoninc.com info@halesonic.com 450-686-6663