


Technical Data

Maximum Operating Pressure 1" to 4"	145 PSI (10 bar) at ambient temperature
Maximum Operating Pressure 6" and 8"	85 PSI (6 bar) at ambient temperature
Operating Temperature Range	-10°C to 95°C Depending on operating pressure. Consult us
Body Material Options	SS304 or SS316L
Internal Surface Finish	32 Ra max
Seat Material Options	Silicone, EPDM or Viton

Actuated Clamp Butterfly Valve with Pneumatic

Size	G	A	Dc	H1	H
1"	50.5	66.0	85.0	149.0	218.0
1½"	50.0	70.0	85.0	149.0	222.0
2"	64.0	76.0	85.0	149.0	229.0
2½"	77.5	80.0	85.0	149.0	237.0
3"	91.0	84.0	85.0	149.0	243.0
4"	119.0	104.0	85.0	149.0	256.0
6"	166.8	110.0	108.0	183.0	331.0
8"	217.0	120.0	133.0	258.0	451.0


Dimensions in mm

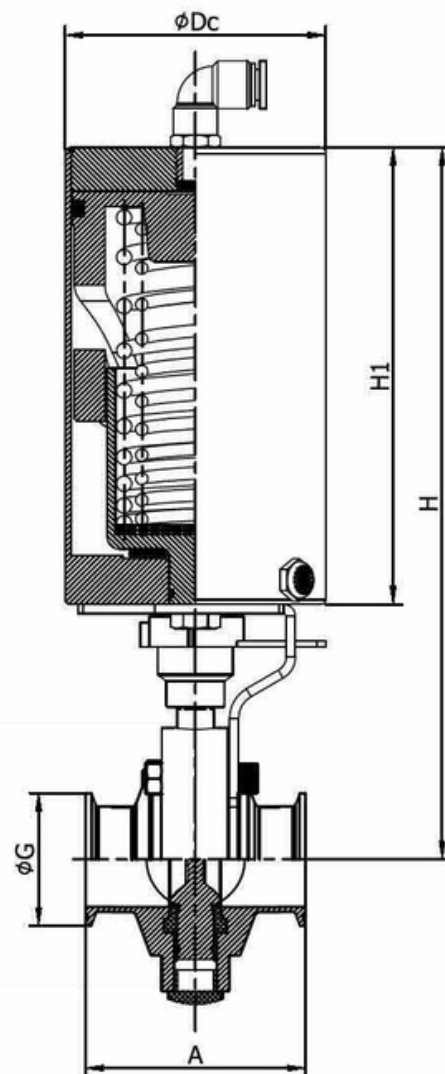

Actuated Weld Butterfly Valve with Pneumatic

Size	G	T	A	Dc	H1	H
1"	25.4	1.65	50.0	85.0	149.0	218.0
1½"	38.1	1.65	50.0	85.0	149.0	222.0
2"	50.8	1.65	52.0	85.0	149.0	229.0
2½"	63.5	1.65	56.0	85.0	149.0	237.0
3"	76.2	1.65	58.0	85.0	149.0	243.0
4"	101.6	2.1	64.0	85.0	149.0	256.0
6"	152.4	2.8	80.0	108.0	183.0	331.0

Dimensions in mm

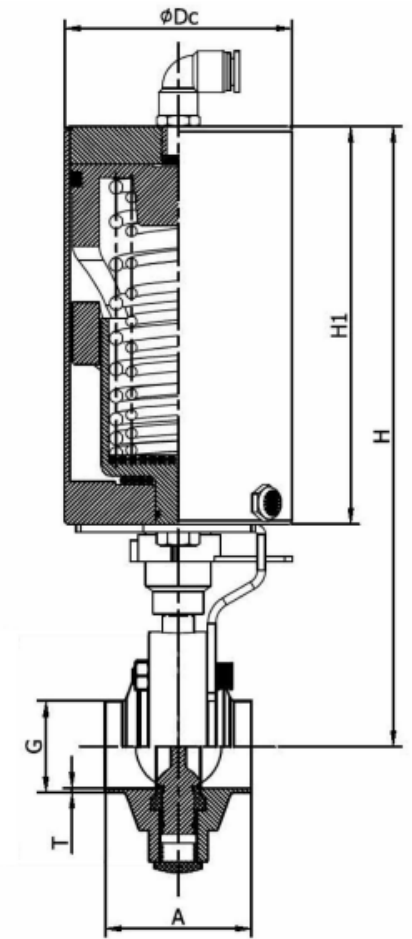

Flow Rate/ Pressure Drop

